


BRASS MANIFOLD DATA SHEET ZL-1132 series



Performances


| | |
|---------------------------|--|
| Medium | Water、 glycol solutions (Max. percentage of glycol is 30%) |
| Working temperature range | 5~100°C |
| Maximum working pressure | 10bar |
| Centre distance | 50mm |
| Materials | Brass |

Characteristic Components

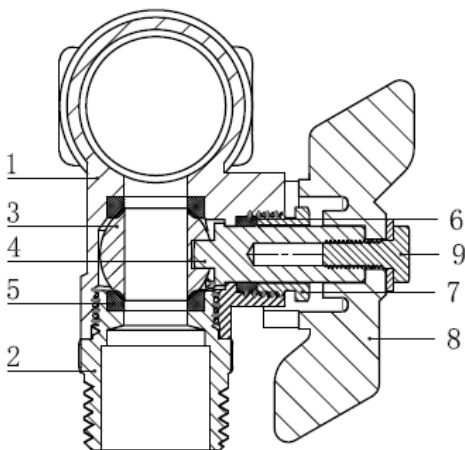

| No. | Components | Material |
|-----|----------------|----------|
| 1 | Manifold Body | Brass |
| 2 | Bonnet | Brass |
| 3 | Valve ball | Brass |
| 4 | Valve stem | Brass |
| 5 | Plastic spring | PTFE |
| 6 | Packing | PTFE |
| 7 | Nut | Brass |
| 8 | Handle | AL |
| 9 | Screw | A304 |

Dimentions

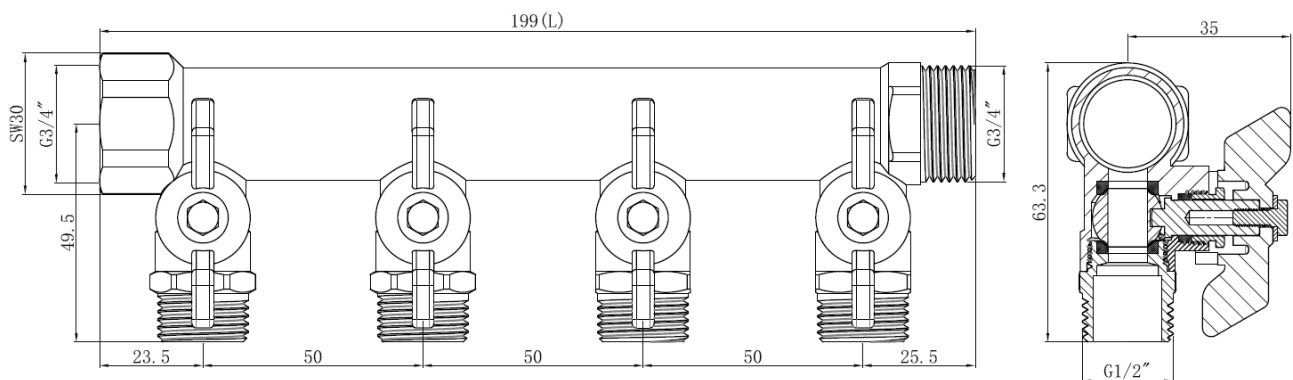

| Code | No.of outlets | L |
|---------------|---------------|-----|
| ZL11322015002 | 2 | 99 |
| ZL11322015003 | 3 | 149 |
| ZL11322015004 | 4 | 199 |
| ZL11322015005 | 5 | 249 |
| ZL11322015006 | 6 | 299 |